



SPECIFICATIONS

CAPACITY	9" (230mm) Dia
MOUNTING TYPE	DPC Discs on 5/8-11 Arbor
PERFORMANCE	2,700/3,200rpm @ 38/45lpm
FLOW RANGE	15 to 45lpm
OPTIMUM FLOW	38 Litres per minute
PRESSURE	175 Bar (2,500 Psi) max
SYSTEM TYPE	Open Centre
MOTOR	Stanley Hyrevz™ Gear
PORTING	-8 SAE O-Ring
HOSE WHIPS	No
CONNECTION	Flat Face Couplings
LENGTH	280mm
WIDTH	305mm
WEIGHT	6.4 Kg

Features and Benefits

Stanley's Underwater GR29 Grinder can be used for grinding and cleaning with cup or standard grinding wheels, wire or nylon brushes.


The integral Stanley Hyrevz™ gear motor is manufactured to exacting standards to deliver maximum efficiency.

There are two positions available for the assist handle to be conveniently placed by the operator. Either position is at a most comfortable handling position from the valve handle.

The plastisol covering the handle transmits very little heat. The plastisol gives a more comfortable grip to the tool.

The wheel guard is adjustable. By loosening the clamp screw the guard may be rotated to any convenient position.

GR29 Hydraulic Flow Vs Shaft Speed

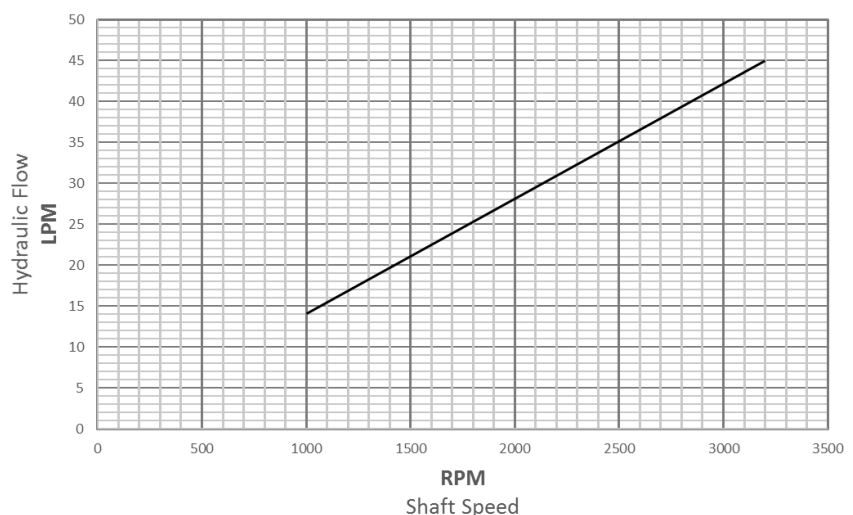

ORDERING INFORMATION

MODEL/PART No.	DESCRIPTION
GR2930101	Underwater Model OC, Trigger Guard, Assist Handle, Couplings, CE

ACCESSORIES

PART No.	DESCRIPTION
28913	Drive Flange SS
16495	Hub Nut SS
24040	Pin Spanner PS30.5-5 BLUE (for 16495)
08130	Assist Handle
AC230-22	ALL-CUT Diamond Grit Disc 9"
AG230-22	ALL-GRIND Diamond Grit Disc 9"
GW778DCS	Abrasive Grinding Disc for Metal 7" DPC
GW778DCM	Abrasive Grinding Disc for Stone 7" DPC
GW978DCS	Abrasive Grinding Disc for Metal 9" DPC
GW978DCM	Abrasive Grinding Disc for Stone 9" DPC
CW778DCS	Abrasive Cutting Disc for Metal 7" DPC
CW978DCS	Abrasive Cutting Disc for Metal 9" DPC
CW978DCM	Abrasive Cutting Disc for Stone 9" DPC
GW49105S	Spin-On Abrasive Grinding Disc for Metal 9" x 5/8-11
GW48983S	Spin-On Abrasive Cutting Disc for Metal 9" x 5/8-11
322633	Diamond Cutting Disc 7" FLAT DT 600 U
322634	Diamond Cutting Disc 9" FLAT DT 600 U
NB160	Nylon Brush 160mm Dia
NB160ADP	Adaptor Plate for NB160
CWB125-CB58	Cup Wire Brush 125mm Dia, Crimped Bristles
CWB100-TK58	Cup Wire Brush 100mm Dia, Twist Knot
BWB115-TK58	Bevel Wire Brush 115mm Dia, Twist Knot
50830	Barnacle Basher 6" Dia
HW3M8R2S8N8	Hyd Hose Whip Set 3m Lg
FIRG12NPT	Hyd Coupler Set, Flat Face 1/2" NPT
6130-08	Hyd Coupler Set, Brass Screw Lock (Hex Nut) 1/2" NPT

WARRANTY

Stanley Hydraulic Tools and their associated parts are warranted against defects in materials and workmanship for a period of twelve months from the date of purchase. Stanley Hydraulic Tools reserves the right to repair or replace only those parts which prove to have been defective at the time of purchase. This warranty becomes void if maximum flow and pressure ratings are exceeded.

SERVICE ITEMS / TOOLS

PART No.	DESCRIPTION
16969	Seal Kit
13813	Bearing
04337	O-Ring Tool Kit

TEST EQUIPMENT

04182	Flow & Pressure Tester
-------	------------------------

All Stanley Hydraulic Tools, parts, accessories and allied equipment are subject to design improvements, specification and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your applications, please consult us.