

SM21 SUBMERSIBLE PUMP

STANLEY



The **SM21** Submersible Pump is a small diameter (caisson style) self priming hydraulic dewatering pump with a discharge flow of 300 gpm thru a 2½" NPFT discharge. At only 6¼" wide

the **SM21** can fit in small openings. The cast iron impeller is within ¾" of the base allowing it to remove more liquids than other pumps. See chart below for gpm discharge at flow.




SPECIFICATIONS

Capacity	2½" NPFT Discharge
Performance	300 gpm / 1135 lpm
Flow Range	4-9 gpm / 15-34 lpm
Working Pressure	1000-2000 psi / 70-140 bar
Full Relief Setting	2250 psi / 155 bar
Weight	22½ lbs / 10 kg
Length	16½" / 42 cm
Width	6¼" / 15.9 cm
Hydraulic Ports	- 6 SAE O-ring
Connection	¾" Male Pipe Adapter
Couplers	Yes
Hose Whips	Yes

FEATURES

- Stanley Hyrevz gear motor
- Stainless Steel fasteners
- Submersible and Self Priming
- Can run dry without damage
- 300 gpm (1135 lpm)
- 2½" discharge
- Cast-in lifting eye

SM21 PERFORMANCE GRAPH

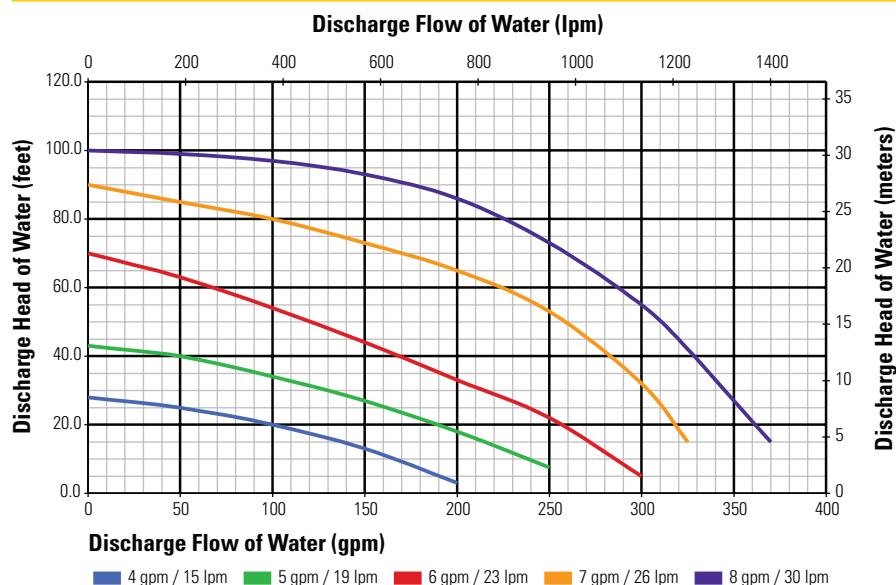

SM21 SUBMERSIBLE PUMP

STANLEY

ORDERING INFORMATION

PART NUMBER

SM2151101 Submersible Pump, CE, 8 gpm, cast iron impeller, 300 gpm, output, 2½" NPTF, with FF couplers


ACCESSORIES

03971	Flush-Face Coupling Set, ¾" NPT
03974	Flush-Face Coupling Set, ½" NPT
31848	Dual Hose, 50' x ½", with couplers
31972	Dual Hose, 25' x ½", with couplers
58633	Twinned Hose, 25' x ½", with couplers
58634	Twinned Hose, 50' x ½", with couplers
02183	Fire Hose, 25' x 2½" Diameter
02317	Fire Nozzle, 1" Output
05133	2½" Threaded Adapter, Pump to Fire Hose
05134	Fire Hose, 50' x 2½" Diameter
05135	Spanner Wrench for Pin Lug Coupler

When hydraulic hose exceeds 100' (30.4 m) in length, increase I.D. of both pressure and return hose. For more information, consult Stanley Hydraulic Tools.

IMPORTANT

To fill out a Product Warranty Recording form and for information on your warranty visit stanleyhydraulic.com and select the Warranty tab.

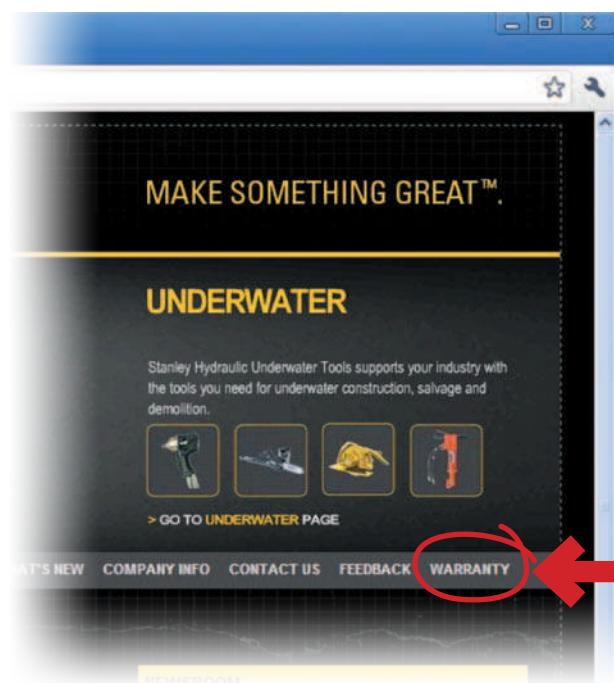

Note: The warranty recording form must be submitted to validate the warranty.

All Stanley Hydraulic Tools, parts, accessories and allied equipment are subject to design improvements, specifications and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your applications, please consult Stanley Hydraulic Tools.