

IW12 UNDERWATER IMPACT WRENCH

STANLEY



The Stanley **IW12** is a medium duty $\frac{3}{4}$ " square drive impact wrench designed for underwater bolting and drilling applications. Powered by a Stanley integral Hyrevz motor, the **IW12** has a durable swing hammer impact mechanism with adjustable impact intensity from 250 to 1200 ft lbs (340 to 1632 Nm) of torque. Designed to run from a wide range of hydraulic circuits, this wrench allows underwater bolting in the most extreme applications. Trigger guard and hi-visibility yellow paint is standard.

SPECIFICATIONS

Capacity	$\frac{3}{4}$ " / 19 mm Square Drive
Torque	250 -1200 ft lbs / 340-1632 Nm
Flow Range	4-12 gpm / 15-45 lpm
Working Pressure	1000-2000 psi / 70-140 bar
Full Relief Setting	2250 psi / 155 bar
Weight	14 lbs / 6.4 kg
Length	11 $\frac{1}{4}$ " / 28.6 cm
Width	4" / 10.2 cm
Hydraulic Ports	-8 SAE O-ring
Connect Size and Type	$\frac{3}{8}$ " Male Pipe Adapter
Couplers	(See Ordering Information)
Hose Whips	No (See Accessories)

FEATURES

- Integral Stanley Hyrevz gear motor produces high torque
- Stainless Steel spools and fasteners
- Forward-Reverse with variable speed
- Pistol grip style handle
- Adjustable impact intensity
- 1200 ft lbs/1632 Nm of maximum impact torque
- Oversized trigger with guard for operator comfort
- Plastisol handle for comfortable ergonomic grip
- Durable swing hammer mechanism
- Cast-in lifting eye

IW12 UNDERWATER IMPACT WRENCH

STANLEY

ORDERING INFORMATION

PART NUMBER

IW12340C Impact Wrench, Underwater, ¾" Square Drive, less couplers

IW1234001 Impact Wrench, Underwater, CE, ¾" Square Drive, with couplers

ACCESSORIES

03971 Flush-Face Coupling Set, ¾" NPT

03974 Flush-Face Coupling Set, ½" NPT

06830 Hose Whip 18" long, -8 SAE x ½" NPT

31848 Dual Hose, 50' x ½", with couplers

31972 Dual Hose, 25' x ½", with couplers

58633 Twinned Hose, 25' x ½", with couplers


58634 Twinned Hose, 50' x ½", with couplers

01857 Adjustable Chuck & Adapter ¾" sq female x ¾" Chuck

When hydraulic hose exceeds 100' (30.4 m) in length, increase I.D. of both pressure and return hose. For more information, consult Stanley Hydraulic Tools.

IMPORTANT

To fill out a Product Warranty Recording form and for information on your warranty visit stanleyhydraulic.com and select the Warranty tab.

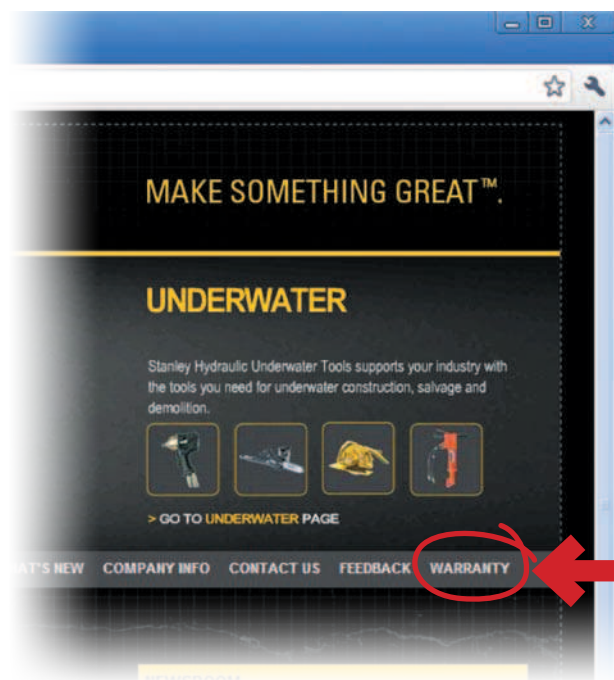

Note: The warranty recording form must be submitted to validate the warranty.

All Stanley Hydraulic Tools, parts, accessories and allied equipment are subject to design improvements, specifications and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your applications, please consult Stanley Hydraulic Tools.

STANLEY

Stanley Hydraulic Tools | 3810 SE Naef Road | Milwaukie, Oregon 97267 | +01.503.659.5660 | 800.972.2647 | www.stanleyhydraulic.com