

HYCON HWP2 SUBMERSIBLE PUMPS



PRODUCT FEATURES

Although small and light, the HWP2 water pump can pump up to 35 m³/h. The outside diameter is only 23.8 cm making it ideal for small manholes etc. where space is tight.

Because it is a VORTEX pump it is not affected by dirty water and solids. In construction, heavy-duty pumps are a must to secure no downtime on the jobsite. It will work all day every day, because of the Hydraulic direct drive motor that will make sure that the pump can run dry without damage to the motor or seals.

HYDRAULIC SUBMERSIBLE PUMP HWP2

Item no. HWP2, 20-30 l.p.m. **3030002**

PLEASE NOTE:

Discharge Hose is not included.

10 m. discharge hose with couplings. **4032697**

Weight, kg 7,7

Oil Flow, lpm 20-30

Max pressure, bar 172

Capacity, m³/h 35


Max head, m 30

Max solids, mm ø38

Outlet 2" BSP

HYCON HWP2 PERFORMANCE CURVE

2" Submersible Pump

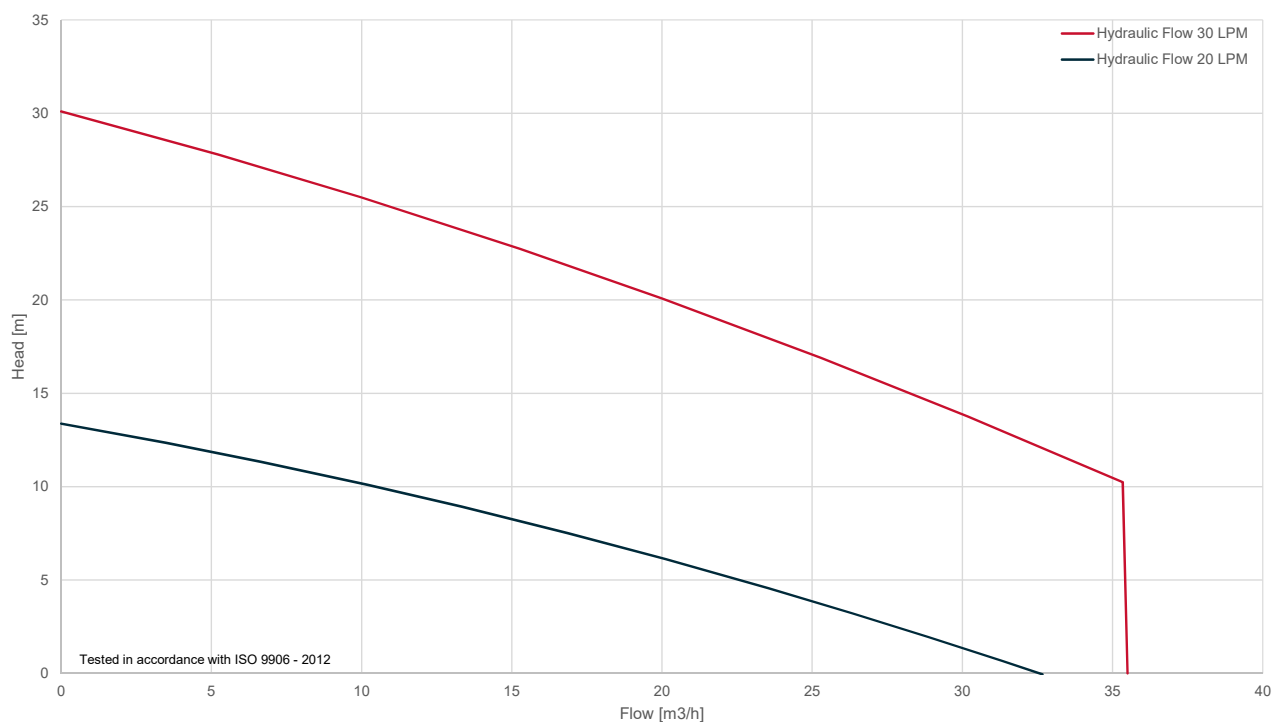

Contact us for more information:
hycon@hycon.dk / +45 96 47 52 00

THE HYCON PRODUCT RANGE

CUT-OFF AND RING SAWS • CORE DRILLS • POST DRIVERS • PICK HAMMER • LIGHT & HEAVY DUTY BREAKERS
SUBMERSIBLE PUMPS • ROCK DRILLS • UNDERWATER EQUIPMENT • GASOLINE, DIESEL AND ELECTRIC POWER PACKS



HYCON A/S
Juelstrupparken 11
DK-9530 Støvring

Tel +45 9647 5200
Fax +45 9647 5201
www.hycon.dk

DISTRIBUTOR: