# HYCON HWP3 SUBMERSIBLE PUMPS



### **PRODUCT FEATURES**

The HWP3 water pump weighing only 11 kg has a capacity up to 85 m<sup>3</sup>/h per hour making it extremely powerful compared to weight.

Even though a 3" pump, the outside diameter is only 30 cm making it suitable for many applications, even in narrow spaces. The VORTEX design ensures long lifetime and no downtime even in the demanding construction business. It will work all day every day, because of the Hydraulic direct drive motor that will make sure that the pump can run dry without damage to the motor or seals.


\*PLEASE NOTE: 10 m. Discharge Hose Kit (incl. 3" BSP Male coupling) is not included in the pump.

## **HYCON HWP3 PERFORMANCE CURVE**

## **HYDRAULIC SUBMERSIBLE PUMP HWP3**

Item no. HWP3 - Standard. Strainer*	3030003
Item no. HWP3 - Fine Strainer*	3030003-01
10 m. discharge hose kit incl. 3" BSP Male coupling.	4032698
Weight, kg	11
Oil Flow, Ipm	20-30
Max pressure, bar	172
Capacity, m³/h	85
Max head, m	20
Max solids - Standard Strainer, mm	ø63
Max solids - Fine Strainer, mm	ølO
Outlet	3" BSP

#### 3" Submersible Pump

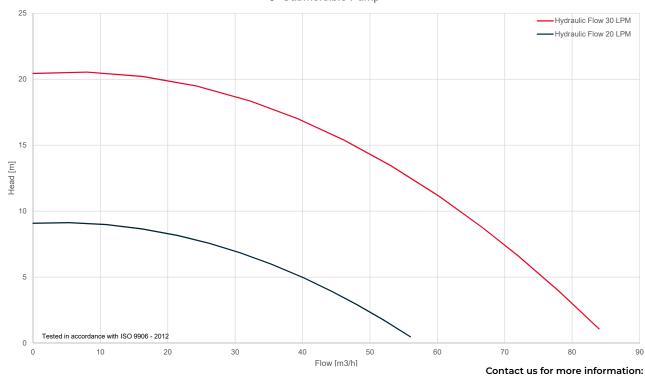

#### THE HYCON PRODUCT RANGE

CUT-OFF AND RING SAWS • CORE DRILLS • POST DRIVERS • PICK HAMMER • LIGHT & HEAVY DUTY BREAKERS SUBMERSIBLE PUMPS • ROCK DRILLS • UNDERWATER EQUIPMENT • GASOLINE, DIESEL AND ELECTRIC POWER PACKS



hycon@hycon.dk / +45 96 47 52 00